


Flood Alert

Surveillance alarm for moisture intrusion in rooms

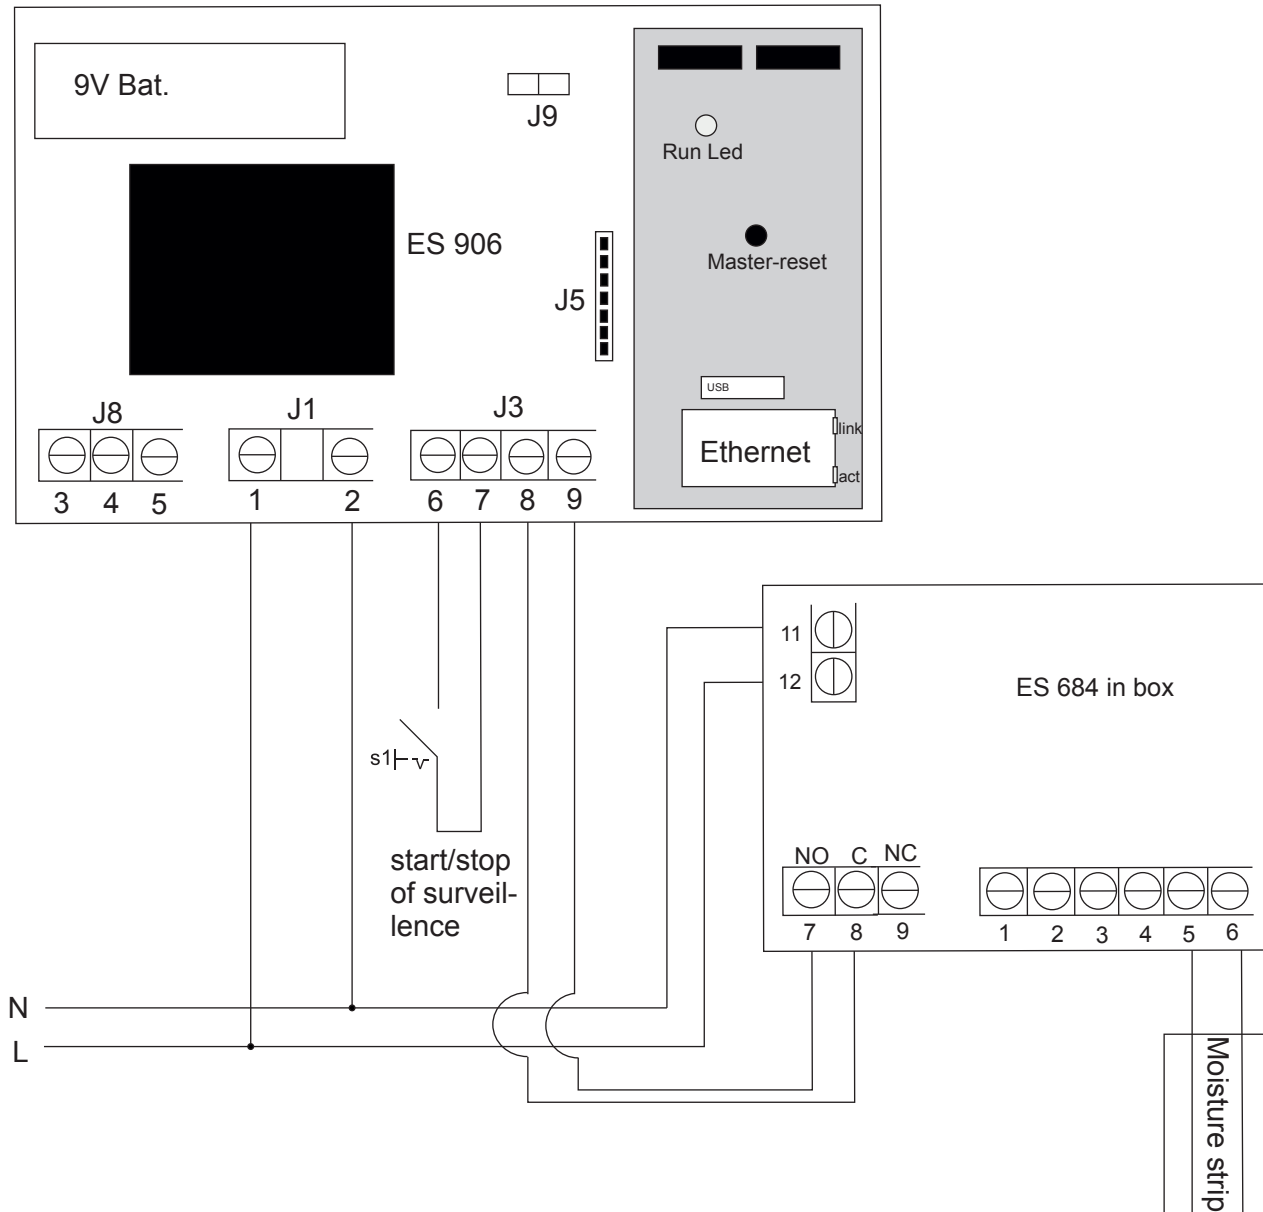

Technical specifications:

Please consult technical specs for i-MessageAlarm and moisture switch.

Description:

Moisture strip is sealed to the floor and connected to the moisture switch. The moisture switch then monitors how much moisture is on the floor. At 80% humidity the i-MessageAlarm is activated and the warning lights and the akustic alarm goes on and at the same time the i-MessageAlarm sends a text message to a predetermined address. For the ladder function to work, the i-MessageAlarm must be connected to the internet.

Adjustment:

Please refer to the i-MessageAlarm and MoistureSwitch manual.

Mounting:

The FloodAlert is to be mounted according to general applicable mounting regulations. i-MessageAlarm is to be mounted on a level and stable surface and fixed with screws in the 4 corner holes. The i-MessageAlarm is not to be mounted on moving and vibrating surfaces.

Drawing: 950-205727_FloodAlert_40820_DK

Rev.: 1.1

Date: 12/5-2016

Drawn by: UP/DF

Manufactured by: **LS Control A/S**

Industrivej 12, 4160-Herlufmagle, Denmark



lsc@lscontrol.dk

tel. +45 5550 5550

fax +45 5550 2265